


Mini-S Series Coupling


Mini-S Series design was developed for Paint Spray Gun and Air Blow Gun. Compact and light weight Body

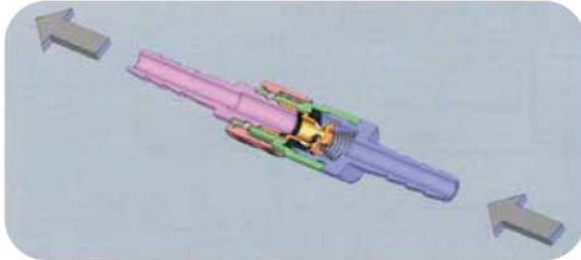

Body Material	Steel, Aluminum
Max. Pressure	1.5 MPa
Burst Pressure	2.0 MPa
Sealing material	NBR
Temperature range in use	-20°C ~ +60°C

● Please do not wash this coupling with thinner.

Male Thread Socket




Model	Thread(T)	A	φD	φF	H	Weight(g)
SA-2MS	R1/4	49.5	18.7	6	17	29
S-2MS	R1/4	49.5	18.7	6	17	52

Male Thread Plug





Model	Thread(T)	A	φE	F	H	Weight(g)
S-2MP	R1/4	34	6	6	17	22

Female Thread




Model	Thread(T)	A	φD	H	Weight(g)
SA-2FS	Rc1/4	49.5	18.7	17	46
S-2FS	Rc1/4	49.5	18.7	17	54

Female Thread




Model	Thread(T)	A	φE	H	Weight(g)
S-G2FP	G1/4	28	6	17	18

Barb Connection Socket




Model	Hose	A	C	φD	φF	H	Weight(g)
SA-2HS	1/4	66.5	8.5	18.7	5	17	40
S-2HS	1/4	66.5	8.5	18.7	5	17	52

Barb Connection Plug




Model	Hose	A	B	φC	φE	φF	Weight(g)
S-2HP	1/4	51	12	8.5	6	5	14

Nut Connection Socket



Model	Hose	A	φD	φF	H1	H2	Weight(g)
SA-65CS	6.5×10.0	54.5	18.7	5.7	17	16	34
S-65CS	6.5×10.0	54.5	18.7	5.7	17	16	34

Nut Connection Plug



Model	Hose	A	φE	φF	H1	H2	Weight(g)
S-65CP	6.5×10.0	38.5	5.7	5.7	17	16	32